
Product datasheet

Specifications



Single Switch Power Point, Clipsal Solis T Series, Smart Switch, Horizontal Mount, 230V-240V, 10A

1010CSZ-BB

Main

Range	Clipsal Solis T Series
Product or component type	Socket with wiser connected switch
Product brand	Clipsal
Assembly Type	Complete product
Colour tint	Brushed brass
Software name	Wiser Home
Protection	Shuttered
Memory usage	Backup
Main colour tint	Brushed brass

Complementary

Control type	Rocker
Number Of Outlets	1
Socket-outlet type	Single socket-outlet
Mounting Type	Screw
Installation Type	Flush
Installation Orientation	Horizontal
Material	Aluminium
Surface finish	Metallic
[Ue] rated operational voltage	230/240 V AC
Network frequency	50 Hz
[In] rated current	10 A
Connections - terminals	4 x 2.5 mm² screw terminals 3 x 4 mm² screw terminals
Embedding depth	63 mm
Depth	66.9 mm
Height	74 mm
Width	148 mm
Mounting Centers	84 mm
Communication network type	ZigBee 50 m
Cut-out dimensions	93 x 50 mm
surface treatment	Anodised

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Screwdriver shape	Philips No 2 Square drive no 1 (SQ1)
Wire stripping length	16 mm
Number of power socket outlets	1 x 2P + E, Australian/New Zealand
Cover Thickness	3.9 mm
Number Of Switches	1

Environment

Product certifications	RCM
Standards	AS/NZS 3112
Relative humidity	10…95 %
Ambient air temperature for operation	0…45 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.5 cm
Package 1 Width	8 cm
Package 1 Length	8 cm
Package 1 Weight	214 g
Unit Type of Package 2	CAR
Number of Units in Package 2	30
Package 2 Height	32.5 cm
Package 2 Width	25 cm
Package 2 Length	41 cm
Package 2 Weight	6.8 kg

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**3 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**0.7 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**1 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**0.4 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.3 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**Yes**
EU RoHS Directive	**Compliant By Exemption**
REACh Regulation	**Reference contains Substances of Very High Concern above the threshold**
Halogen-free status	**Product contains halogen above thresholds**
PVC free	**PVC-free product**


Use Again


Repack and remanufacture


Recyclability potential, in %	**33**
End of life manual availability	**No need of specific recycling operations**
Take-back	**No**


Image of product / Alternate images


Alternative

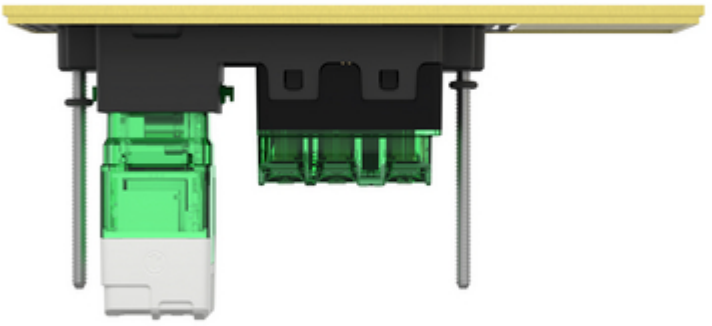


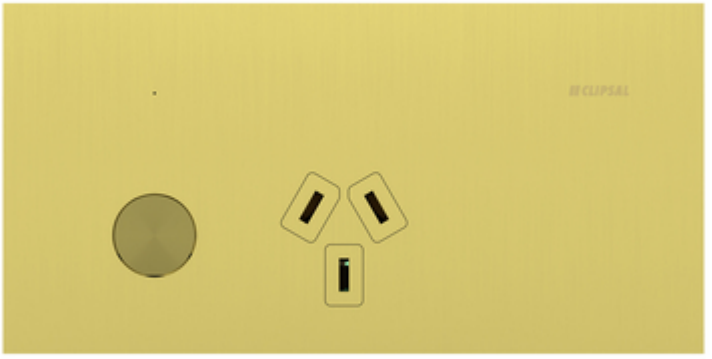

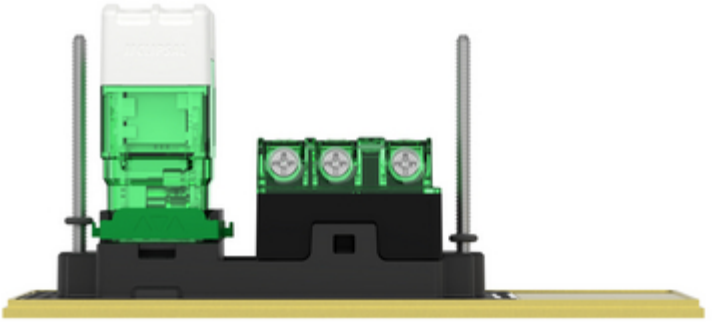

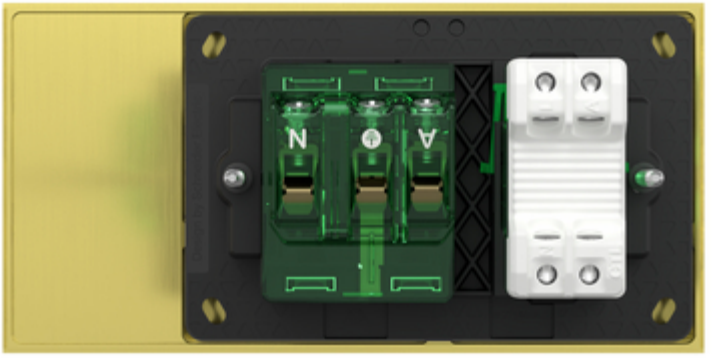
N
A

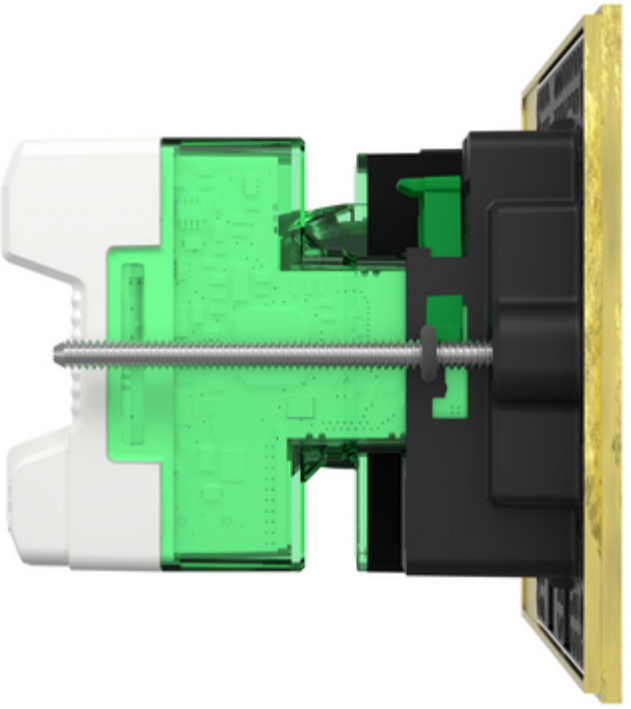

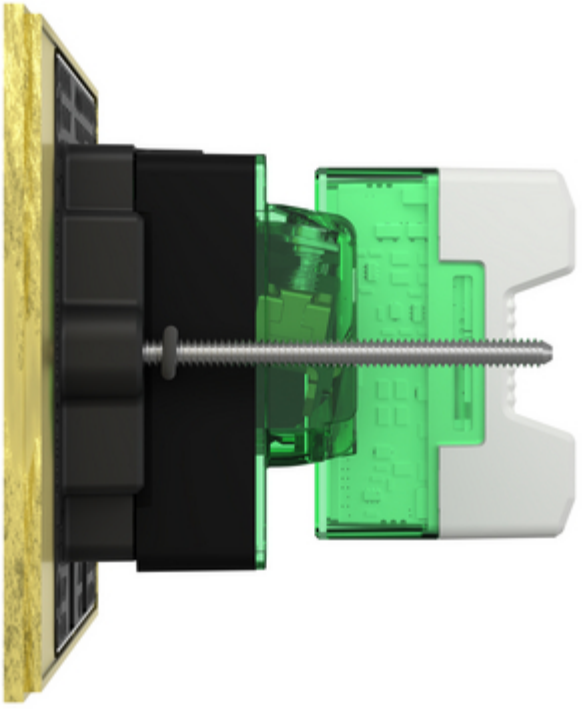

Product datasheet

1010CSZ-BB

