Product datasheet

Specifications



Double Switch Power Point, Clipsal Solis, Double Switch Power Point with USB C Charger, Horizontal Mount, 230V-240V, 10A

1025USBC-ZB

Main

Product or component type	Switched socket with USB charger
Assembly Type	Complete product
Standards	AS/NZS 3112
Product certifications	RCM
Main colour tint	Zen black

Complementary

Range	Clipsal Solis
Number Of Outlets	2
Device mounting	Wall mounted 65 mm
Cover type	With shutter
Number of power socket outlets	2 x 2P + E, Australian/New Zealand
Rated current	10 A 230/240 V, AC, 50 Hz
Connections - terminals	4 x 2.5 mm² screw terminals 3 x 4 mm² screw terminals
Colour tint	Matt black
Surface finish	Matt
surface treatment	Painted
Additional Function	USB type C
Material	Plastic
Screwdriver shape	Philips No 2 Square drive no 1 (SQ1)
Wire stripping length	16 mm
Fixing mode	By screw
fixing center	120 mm
Height	74 mm
Width	148 mm
Depth	69.5 mm
Sale per indivisible quantity	1
Installation Type	Flush
Installation Orientation	Horizontal
Control type	Rocker

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Cover Thickness	4.5 mm
Cut-out dimensions	130 x 50 mm
Number Of Switches	2
Fly-lead length	155 mm

Environment

Ambient air temperature for operation	0…45 °C
Relative humidity	10…95 %

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.5 cm
Package 1 Width	8 cm
Package 1 Length	8 cm
Package 1 Weight	233 g
Unit Type of Package 2	CAR
Number of Units in Package 2	30
Package 2 Height	32.5 cm
Package 2 Width	25 cm
Package 2 Length	41 cm
Package 2 Weight	7.37 kg

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**106 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**2 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**1 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**103 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.5 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**No**
EU RoHS Directive	**Compliant By Exemption**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
Halogen-free status	**Product contains halogen above thresholds**
PVC free	**PVC-free product**

Use Longer

Lifetime extension

Repair	**No**

Use Again

Repack and remanufacture

Recyclability potential, in %	**18**
End of life manual availability	**No need of specific recycling operations**
Take-back	**No**

Image of product / Alternate images

Alternative

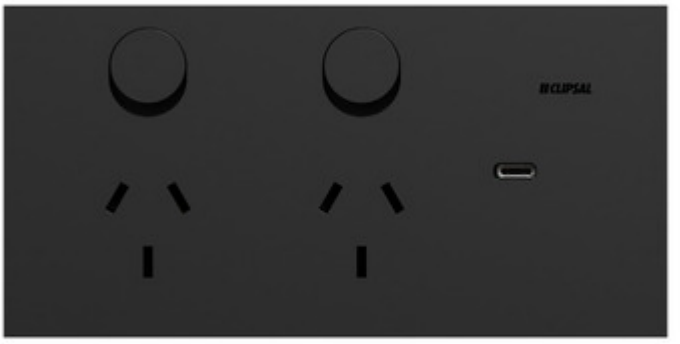

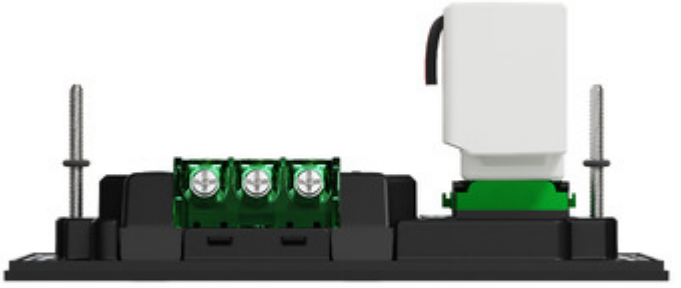

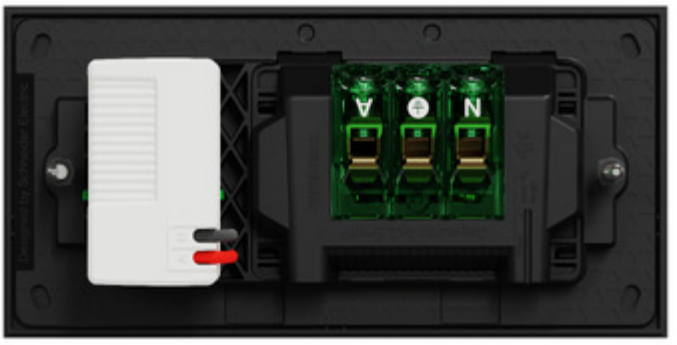
A
N




A
N



