Product datasheet

Specifications



Double Switch Power Point, Solis T Series, Horizontal Mount, 230V-240V, 10A, Removable Extra Switch

1025XUA-EA

Main

Range	Clipsal Solis T Series
Product or component type	Switched socket
Product brand	Clipsal
Assembly Type	Complete product
Colour tint	Ebony aluminium
Protection	Shuttered
Main colour tint	Ebony aluminium

Complementary

Control type	Rocker
Number Of Outlets	2
Socket-outlet type	Double socket-outlet
Mounting Type	Screw
Installation Type	Flush
Installation Orientation	Horizontal
Material	Aluminium
Surface finish	Metallic
[Ue] rated operational voltage	230/240 V AC
Network frequency	50 Hz
[In] rated current	10 A
Connections - terminals	4 x 2.5 mm² screw terminals 3 x 4 mm² screw terminals
Embedding depth	23.5 mm
Depth	27.4 mm
Height	74 mm
Width	148 mm
Mounting Centers	120 mm
Cut-out dimensions	131× 54 mm
surface treatment	Painted
Screwdriver shape	Philips No 2 Square drive no 1 (SQ1)
Wire stripping length	16 mm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Number of power socket outlets	2 x 2P + E, Australian/New Zealand
Cover Thickness	3.9 mm
Number Of Switches	2

Environment

Product certifications	RCM
Standards	AS/NZS 3112
Relative humidity	10…95 %
Ambient air temperature for operation	0…45 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	15.5 cm
Package 1 Width	6 cm
Package 1 Length	8 cm
Package 1 Weight	176 g
Unit Type of Package 2	CAR
Number of Units in Package 2	40
Package 2 Height	32.5 cm
Package 2 Width	25 cm
Package 2 Length	41 cm
Package 2 Weight	7.42 kg

Contractual warranty

Warranty (in months)	18

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**2 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**0.7 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**1 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**0.4 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0.3 kg CO2 eq.**
Environmental Disclosure	**Product Environmental Profile**

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**No**
EU RoHS Directive	**Compliant**
REACh Regulation	**Free of Substances of Very High Concern above the threshold**
Halogen-free status	**Product contains halogen above thresholds**
PVC free	**PVC-free product**

Use Again

Repack and remanufacture


Recyclability potential, in %	**33**
End of life manual availability	**No need of specific recycling operations**
Take-back	**No**

Image of product / Alternate images

Alternative






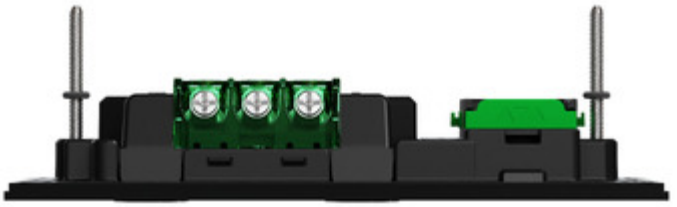



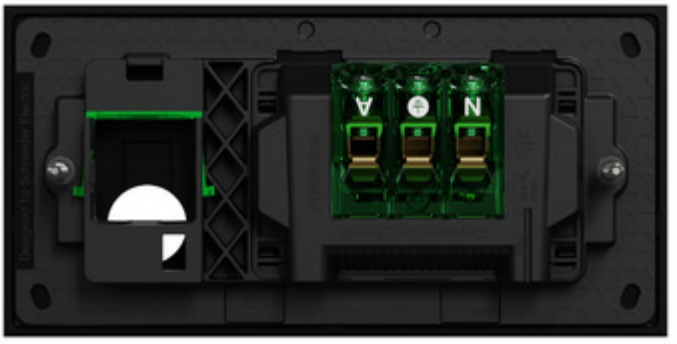


A
N

Product datasheet

1025XUA-EA

