# Product datasheet

Specifications



## Double Switch Power Point, Clipsal Solis, Horizontal Mount, 230V-240V, 10A, Removable Extra Switch

1025XUA-ZB

## Main

| | |
|---|---|
| **Range** | Clipsal Solis |
| **Product or component type** | Switched socket |
| **Product brand** | Clipsal |
| **Assembly Type** | Complete product |
| **Colour tint** | Matt black |
| **Protection** | Shuttered |
| **Main colour tint** | Zen black |

## Complementary

| | |
|---|---|
| **Control type** | Rocker |
| **Number Of Outlets** | 2 |
| **Socket-outlet type** | Double socket-outlet |
| **Mounting Type** | Screw |
| **Installation Type** | Flush |
| **Installation Orientation** | Horizontal |
| **Material** | Plastic |
| **Surface finish** | Matt |
| **[Ue] rated operational voltage** | 230/240 V AC |
| **Network frequency** | 50 Hz |
| **[In] rated current** | 10 A |
| **Connections - terminals** | 4 x 2.5 mm² screw terminals<br>3 x 4 mm² screw terminals |
| **Embedding depth** | 23.5 mm |
| **Depth** | 28 mm |
| **Height** | 74 mm |
| **Width** | 148 mm |
| **Mounting Centers** | 120 mm |
| **Cut-out dimensions** | 131× 54 mm |
| **surface treatment** | Painted |
| **Screwdriver shape** | Philips No 2<br>Square drive no 1 (SQ1) |
| **Wire stripping length** | 16 mm |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|---|---|
| **Number of power socket outlets** | 2 x 2P + E, Australian/New Zealand |
| **Cover Thickness** | 4.5 mm |
| **Number Of Switches** | 2 |

## Environment

| | |
|---|---|
| **Product certifications** | RCM |
| **Standards** | AS/NZS 3112 |
| **Relative humidity** | 10…95 % |
| **Ambient air temperature for operation** | 0…45 °C |

## Packing Units

| | |
|---|---|
| **Unit Type of Package 1** | PCE |
| **Number of Units in Package 1** | 1 |
| **Package 1 Height** | 15.5 cm |
| **Package 1 Width** | 6 cm |
| **Package 1 Length** | 8 cm |
| **Package 1 Weight** | 150 g |
| **Unit Type of Package 2** | CAR |
| **Number of Units in Package 2** | 40 |
| **Package 2 Height** | 32.5 cm |
| **Package 2 Width** | 25 cm |
| **Package 2 Length** | 41 cm |
| **Package 2 Weight** | 6.38 kg |

## Contractual warranty

| | |
|---|---|
| **Warranty (in months)** | 18 |

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

### Environmental footprint

| | |
|---|---|
| Total lifecycle Carbon footprint | **2 kg CO2 eq.** |
| Carbon footprint of the manufacturing phase [A1 to A3] | **0.7 kg CO2 eq.** |
| Carbon footprint of the distribution phase [A4] | **1 kg CO2 eq.** |
| Carbon footprint of the installation phase [A5] | **0 kg CO2 eq.** |
| Carbon footprint of the use phase [B2, B3, B4, B6] | **0.4 kg CO2 eq.** |
| Carbon footprint of the end-of-life phase [C1 to C4] | **0.3 kg CO2 eq.** |
| Environmental Disclosure | **Product Environmental Profile** |

## Use Better

### Materials and Substances

| | |
|---|---|
| Packaging made with recycled cardboard | **Yes** |
| Packaging without single use plastic | **No** |
| EU RoHS Directive | **Compliant** |
| REACh Regulation | **Free of Substances of Very High Concern above the threshold** |
| Halogen-free status | **Product contains halogen above thresholds** |
| PVC free | **PVC-free product** |

## Use Again

### Repack and remanufacture

| | |
|---|---|
| Recyclability potential, in % | **33** |
| End of life manual availability | **No need of specific recycling operations** |
| Take-back | **No** |

Image of product / Alternate images

**Alternative**

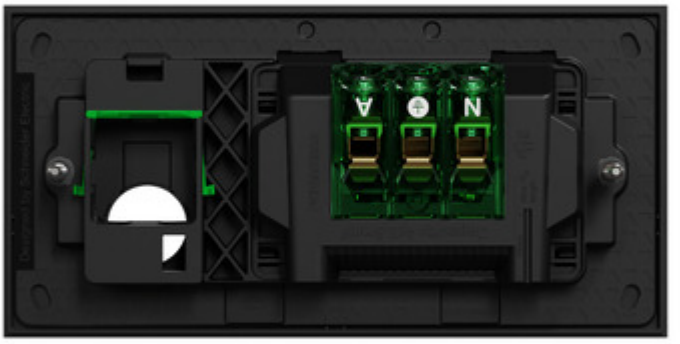




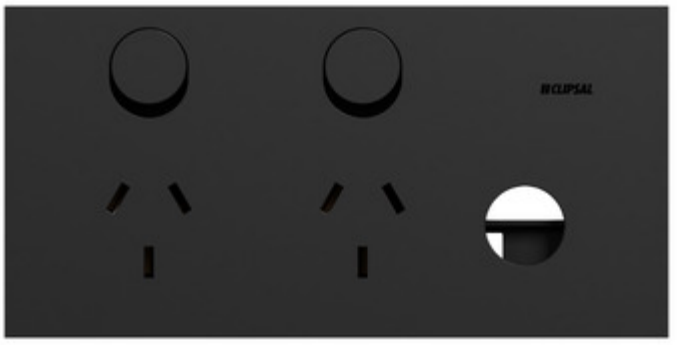
CLIPSAL




A
N

