
# Product datasheet

Specifications




## Run On timer, Standard Series, Clipsal, 1A, with selectable Turn ON and Turn OFF delays, translucent green

31ROFT

## Main

| | |
|---|---|
| **Product or component type** | Run on timer |
| **Product brand** | Clipsal |
| **Range of product** | Standard Series |
| **Device presentation** | Mechanism |
| **Colour tint** | Translucent green |
| **Range** | Standard Series |

## Complementary

| | |
|---|---|
| **Device mounting** | Flush |
| **Material** | Plastic |
| **Surface finish** | Glossy |
| **Autonomy** | 5 minutes |
| **[Ue] rated operational voltage** | 230/240 V AC |
| **Network frequency** | 50 Hz |
| **Rated current** | 1 A |
| **fixing mode** | By screws |
| **Depth** | 12 mm |
| **Width** | 41 mm |
| **Height** | 40 mm |
| **IP degree of protection** | IP30 |
| **Net weight** | 17 g |

## Packing Units

| | |
|---|---|
| **Unit Type of Package 1** | PCE |
| **Number of Units in Package 1** | 1 |
| **Package 1 Height** | 6 cm |
| **Package 1 Width** | 2.6 cm |
| **Package 1 Length** | 5 cm |
| **Package 1 Weight** | 39 g |
| **Unit Type of Package 2** | CAR |
| **Number of Units in Package 2** | 100 |
| **Package 2 Height** | 13.3 cm |

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

| | |
|---|---|
| **Package 2 Width** | 26.3 cm |
| **Package 2 Length** | 27.3 cm |
| **Package 2 Weight** | 4.525 kg |
| **Unit Type of Package 3** | PAL |
| **Number of Units in Package 3** | 11200 |
| **Package 3 Height** | 110 cm |
| **Package 3 Width** | 114 cm |
| **Package 3 Length** | 114 cm |
| **Package 3 Weight** | 517 kg |

## Contractual warranty

| | |
|---|---|
| **Warranty (in months)** | 36 |

## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

More information about methodology >

### Environmental footprint

| | |
|---|---|
| Total lifecycle Carbon footprint | **16 kg CO2 eq.** |
| Carbon footprint of the manufacturing phase [A1 to A3] | **1 kg CO2 eq.** |
| Carbon footprint of the distribution phase [A4] | **0 kg CO2 eq.** |
| Carbon footprint of the installation phase [A5] | **0 kg CO2 eq.** |
| Carbon footprint of the use phase [B2, B3, B4, B6] | **15 kg CO2 eq.** |
| Carbon footprint of the end-of-life phase [C1 to C4] | **0.1 kg CO2 eq.** |
| Environmental Disclosure | **Product Environmental Profile** |

## Use Better

### Materials and Substances

| | |
|---|---|
| Packaging made with recycled cardboard | **Yes** |
| Packaging without single use plastic | **No** |
| EU RoHS Directive | **Compliant** |
| REACh Regulation | **Free of Substances of Very High Concern above the threshold** |
| Halogen-free status | **Halogen free product** |
| PVC free | **Product contains PVC** |
| Silicone-free | **No** |

## Use Again

### Repack and remanufacture

| | |
|---|---|
| Recyclability potential, in % | **0** |
| End of life manual availability | **End of Life Information** |
| Take-back | **No** |

Image of product / Alternate images

**Alternative**












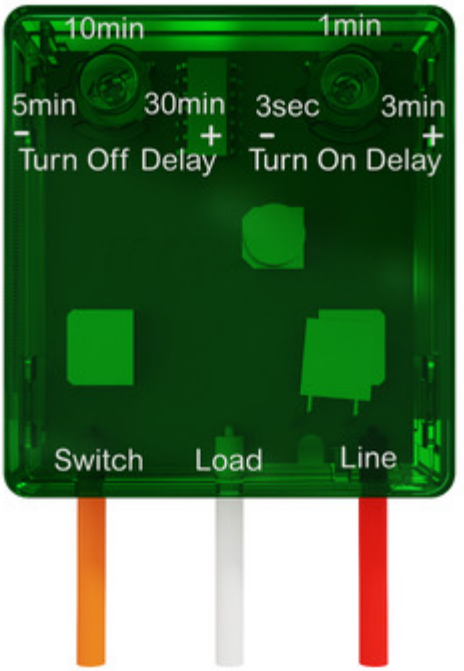

10min
1min
5min
30min
3sec
3min
-
+
-
+
Turn Off Delay
Turn On Delay
Switch
Load
Line


Run On Timer
for Exhaust Fans
31ROFT
Input: 230/240V~ 50Hz ε
M 2.5-240W, M.1.3
Operating Temperature:0-50 ℃
Made in P.R.C
8A-2024-04-25